
lĕvoit

USER MANUAL

Dual 150 Ultrasonic Cool Mist Humidifier

Product Series: Dual 150

Model: LUH-D302-WUS

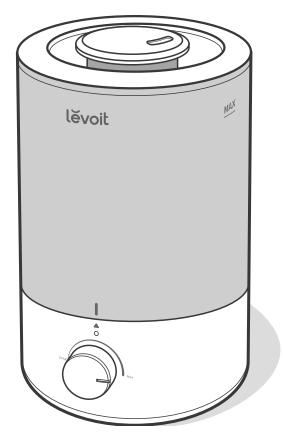

Questions or Concerns?

Please contact us Mon-Fri, 9:00 am-5:00 pm PST/PDT at support@levoit.com or at (888) 726-8520.

READ AND SAVE THESE INSTRUCTIONS SAFETY INFORMATION

To reduce the risk of fire, electric shock, or other injury, follow all instructions and safety guidelines.

General Safety

- **Only** use the humidifier as described in this manual.
- Place the humidifier and cord so that it will not be knocked over. **Do not** place near large pieces of furniture or in high-traffic areas.
- When not in use, turn the humidifier off and disconnect from power by removing the plug from the outlet.
- Do not use the humidifier in wet environments.
- Keep the humidifier out of reach from children.
- **Do not** open the base or remove the water level sensor for selfservicing.
- Always unplug your humidifier from the power outlet before cleaning your humidifier or detaching the water tank from the humidifier base
- **Always** make sure to place the humidifier on a flat, level surface before operation.
- **Only** fill the water tank with clean water. **Never** fill the water tank with any other liquids.
- **Do not** place the humidifier near sources of heat, such as stovetops, ovens, or radiators.
- **Do not** place the humidifier directly on floors, carpets, or rugs.

- **Do not** use other items as replacement parts for this product.
- **Do not** cover the nozzle while the humidifier is on. Doing so may damage the humidifier.
- Remove the water tank from the base before moving the humidifier.
- **Do not** immerse the humidifier base, power cord, or plug in water. If the humidifier is damaged or is not functioning properly, stop using it and contact Customer Support immediately (see page 10).
- This humidifier is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Supervise children when they are near the humidifier.
- Children should not clean or perform maintenance on the humidifier without supervision.
- Children should be supervised to ensure that they do not play with the humidifier.
- Household use only. Not for commercial use.

SAFETY INFORMATION (CONT.)

Power & Cord

- a polarized socket.
- **Do not** handle the power cord or
- Your humidifier has a polarized plug (one prong is wider than the other), which fits into a polarized outlet only one way. This is a safety feature to reduce the risk of electric shock. If the plug does not fit, reverse the plug. If it still does not fit, **do not** use the plug in that outlet. **Do not** bypass this safety feature.
- If the power supply cord is damaged, it must be replaced by Arovast Corporation or similarly qualified persons in order to avoid an electric or fire hazard. Please contact Customer Support (page 10).

Caution: Risk of Leaks and Electric Shock

Do not add supplemental water treatment liquids into the water tank or base chamber. This will damage the humidifier and cause leaks.

- Ensure that the plug fits properly into
- plug with wet hands. Keep the plug and power cord away from liquids.

Package Contents

- 1 × Ultrasonic Cool Mist Humidifier
- 2 × Water Filter Sponges (1 Pre-Installed)
- 1 × Cleaning Brush 1 × User Manual

Specifications

Power Supply	AC 120V, 60Hz		
Rated Power	25W		
Water Tank Capacity	0.79 gal / 3 L		
	Up to 25 hours on minimum mist setting		
Max Run Time	Note: The humidifier may run for a longer or shorter time depending on the environmental temperature and humidity.		
Noise Level	< 28dB		
Effective Range	107–290 ft ² / 10–27 m ²		
Dimensions	7.2 × 8.1 × 11.6 in / 18.3 × 20.6 × 29.4 cm		
Weight	3 lb / 1.38 kg		

GETTING TO KNOW YOUR HUMIDIFIER

K. Cleaning Brush

M. Max Water Line (Tank)

N. Water Outlet Valve


O. Noise Silencer

L. Power Cord

- A. Nozzle
- B. Water Tank Cover
- C. Water Filter Housing D. Water Filter
- E. Mist Tube
- F. Water Tank
- G. Float
- H. Refill Indicator Light

- P. Air Outlet
- Q. Max Water Line (Base)
- R. Float Brackets S. Transducer
- T. Secondary Float
- U. Feet V. Air Inlet

Water tank, upside down



CONTROLS

Control Knob

- Rotate clockwise to turn on the humidifier and to adjust the mist level.
- Rotate counterclockwise to turn off the humidifier.

Note: There is a clicking sound when the humidifier turns on/off.

Refill Indicator Light

- The red light turns on when the water tank is empty. Refill the water tank (see page 5).
- The red light turns off when the water tank is filled.

GETTING STARTED

- 1. Remove all packaging.
- 2. Take the water tank off of the base and remove all tape. [Figure 1.1]
- 3. Rinse and reassemble all parts before first use (see **Cleaning**, page 6).

Note:

 Check to make sure that the water filter is correctly in place. If not, then rotate the filter clockwise to secure it in place. [Figure 1.2]






Figure 1.1

Fiaure 1.2

- Check to make sure that the float is securely in place. [Figure 1.3]
- 4. Choose a hard, flat location for the humidifier at least 12 inches / 30 cm away from any walls. The surface must be water-resistant. [Figure 1.4]




Figure 1.3

Figure 1.4

5. Mist should be directed away from walls, furniture, bedding, and appliances. [Figure 1.5]



Figure 1.5

- . Control Knob J. Base

Filling & Refilling

Note: Make sure the water tank is clean before filling.

1. Turn the humidifier off. 2. Remove the water tank cover by holding the nozzle and pulling upward. [Figure 1.6] 3. Fill the tank with room-temperature water. [Figure 1.7]





Figure 1.6

Figure 1.7

- We recommend using purified or distilled water to fill the tank.
- Do not fill past the tank's max water line.
- Do not fill with hot water.

CAUTION

- **Do not** add water directly into the base chamber. [Figure 1.8]
- Do not add water through the mist tube. [Figure 1.9]



Figure 1.8



Figure 1.9

4. Replace the water tank cover.

> Note: Make sure the nozzle on the water tank cover is placed over the mist tube, or the humidifier may not work correctly. [Figure 1.10]




Figure 1.10

Fillina & Refillina (cont.)

5. Optionally, add 10-15 drops of essential oil into the water tank for aromatherapy. [Figure 1.11]


> Note: For best results, we recommend using pure essential oil.

Figure 1.11

USING YOUR HUMIDIFIER

- 1. Plug in the humidifier. Rotate the Control Knob clockwise to turn the humidifier on. Adjust the knob to your desired mist level. [Figure 2.1]
- 2. Rotate the nozzle to adjust the direction of the mist. [Figure 2.2]
- 3. When your room has reached your preferred humidity level, turn the humidifier to a lower setting, or turn it off.
- 4. Rotate the Control Knob counterclockwise to turn the humidifier off.

Note: If there is no water in the tank or the tank is removed, the humidifier will stop misting and the Refill Indicator light will turn on. Refill the tank and properly place it on the base to use your humidifier.



Important Tips

Your humidifier must have the correct level of water in the base chamber to work properly. If there is too much water in the base chamber, the humidifier cannot create mist.

- Never pour water directly into the base chamber. [Figure 2.3]
- Only add water to the water tank. The humidifier will automatically release the correct amount of water into the base chamber.

- unplug it, and remove the water tank. If your humidifier doesn't produce mist
- correctly, check the max water line to see if there is too much water in the base chamber. Pour out extra water if water is over the max line. [Figure 2.5]

Note: The max water line is only for this purpose. Do not pour water into the base chamber.





Figure 2.3



CARE & MAINTENANCE

- All maintenance should be done on a waterresistant surface, such as a kitchen counter.
- Change the water daily to avoid bacteria growth.
- Use a tissue or cloth to clean the nozzle regularly.
- If not using the humidifier for 3 days or longer, do not leave water inside. Clean and dry the humidifier instead.

Cleaning

You should clean your humidifier every 3 days, and when you're ready to store it.

- Never immerse the base in water or liquid. Do not place any part of the humidifier in a dishwasher.
- **Do not** use detergents to clean the humidifier.

Cleaning (cont.)

- 1. Unplug the humidifier.
- 2. Remove and rinse the water tank cover. [Figure 3.1]
- 3. Remove the water tank from the base and pour out any water from the tank and base chamber. [Figure 3.2]

Note: When pouring out water, hold down the float to ensure that it does not fall out of the base chamber.




Figure 3.2

- 4. Remove the water filter assembly from the tank by rotating it counterclockwise and lifting it out. [Figure 3.3]
- 5. Rinse the tank, water filter assembly, and base chamber with room temperature water. [Fiaure 3.4]



Figure 3.3


Descaling Your Humidifier

- 1. Remove the water filter from the tank by rotating it counterclockwise and lifting it out. [Fiaure 3.5]
- 2. Fill the tank with 3 US cups / 710 mL of distilled white vinegar. [Figure 3.6]




Figure 3.5


- 3. Replace the tank cover and swish the vinegar around the tank. [Figure 3.7]
- 4. Place the tank on the base and soak for 15–20 minutes. Vinegar will drain into the base chamber and loosen scale (mineral buildup) in the tank and in the base chamber (including the transducer and float). [Figure 3.8]



- 5. Remove the tank, remove the tank cover, and pour out any vinegar. [Figure 3.9]
- 6. Flip the tank over and remove the noise silencer. To remove the noise silencer, press the release tabs and gently pull away from the humidifier. [Figure 3.10]



- 7. Remove the float from the base chamber by pulling up one end of the float [Figure 3.11] and pulling the shaft out from the float brackets. One side of the float brackets is open (U-shaped) to allow the shaft to be removed. [Figure 3.12]



8. Place the float, water filter assembly, and noise silencer in a small container. Fill with enough vinegar to cover them. Soak for 15–20 minutes. [Figure 3.13]



Descaling Your Humidifier (cont.)

- 9. Use the cleaning brush and a soft cloth to remove scale from all parts. **10.** Rinse all parts until any vinegar smell is
- completely gone. [Figure 3.14]
- **11.** Dry all parts with a cloth. Make sure all parts are completely dry before reassembling or storing.



Figure 3.14

Reassembling

- 1. Flip the water tank over and place the noise silencer back into the tank. [Figure 3.15]
- 2. Place the water filter assembly back into the tank and rotate it clockwise to secure it in place. [Figure 3.16]



Fiaure 3.15

oblem	Poss
	Turn
	Fill th
	Ther (not f
	Make carp
tle or no mist mes out.	Make
ines out	Make
	The humi
	lf the any o
	Clea
umidifier doesn't	Plug
rn on, or turns off expectedly.	Add

Figure 3.6



Figure 3.4





Fiaure 3.17

Storina



Figure 3.1

ible Solution

- n the mist level to a higher setting
- the water tank.

ere may be too much water in the base chamber. Empty the base chamber. Refill the water tank t the base chamber) and place the water tank properly onto the base.

ke sure the air inlet on the bottom of the base is not blocked. The humidifier should not be set on pet or other surfaces that may block the air inlet

- ke sure the nozzle is not blocked or clogged
- ke sure the humidifier is on a level surface.

e water temperature may be too low. Turn the mist level to the highest setting and let the midifier run for a while, then adjust to the desired setting.

e water tank or base was washed with detergent, rinse thoroughly with clean water to remove y detergent.

ean the water filter assembly (see page 6) or replace it with a new one (see page 10).

ig in the humidifier and turn it on.

d purified or distilled water to the water tank

- a. Make sure the correct side of the float is facing up. [Figure 3.17]
- **b.** Insert the smaller prong into the closed side of the float brackets. [Figure 3.18]
- c. Place the larger prong into the open (U-shaped) side of the float brackets.
- 4. Place the tank back on the base. Refill the tank, if necessary.
- 5. Place the tank properly on the base and place the tank cover on the water tank.



Store in a cool, dry location.	Follow the cleaning instructions (see page 6) and allow all parts to dry completely before storing. Store in a cool, dry location.	
--------------------------------	--	--

Rep	lacing	the	Filter	Asse
-----	--------	-----	--------	------

If the filter assembly is damaged or water cannot flow into the base chamber, the filter or filter assembly needs to be replaced. For more information, contact Customer Support (see page 10).

Humidifier produces	If the humidifier is new, unplug and rinse all parts, then place in a cool, dry place for 12 hours.		
an unusual smell.	Clean the water tank and base chamber (see Care & Maintenance, page 6).		
	Make sure the water tank is properly in place (see Getting Started , page 5).		
Humidifier makes	Set mist level to a lower setting.		
a loud or unusual noise.	Empty the base chamber. Refill the water tank (not the base chamber) and place the water tank properly onto the base.		
	The humidifier may be malfunctioning. Stop using the humidifier and contact Customer Support (see page 10).		
White scale (mineral buildup) appears	We recommend using purified or distilled water to fill the humidifier. Avoid using water with high mineral content.		
around the humidifier.	Clean the humidifier (see Care & Maintenance, page 6).		
Water leaks from the humidifier.	Make sure the silicone sealing ring around the water outlet valve is secure.		
	Avoid running the humidifier in a room with high relative humidity.		
	Wipe any excess water off the top and bottom of the base.		
	Do not shake the humidifier.		
	Make sure to place the humidifier on a flat, level surface.		
	Check the water tank for leaks. If there are leaks, contact Customer Support (see page 10).		
Condensation forms around humidifier or windows.	Humidity may be too high. Turn down the mist level, turn off the humidifier, or open a door or window in the room.		
Mold grows inside the humidifier.	Clean the water tank and base chamber regularly (see Care & Maintenance, page 6).		
	Fill the water tank.		
Refill Indicator Light	Place the water tank properly on the base.		
turns on.	Clean the water filter (see page 6) or replace it with a new one. To request a new water filter, contact		

FEDERAL COMMUNICATION COMMISSION INTERFERENCE STATEMENT - PART 18

This device complies with part 18 of the FCC Rules.

This equipment generates and uses ISM frequency energy and if not installed and used properly, that is in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. It has been type tested and found to comply with limits for an ISM Equipment pursuant to part 18 of FCC Rules, which are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by tuning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following:

Reorient the receiving antenna of radio or television.

Customer Support (see page 10).

Possible Solution

- Relocate the equipment with respect to the receiver.
- Move the equipment away from the receiver.
- Plug the equipment into a different outlet so that the equipment and receiver are on different branch circuits.

Conduct only the user maintenance found in this manual. Other maintenance and servicing can cause harmful interference and can void the required FCC compliance. The manufacturer is not responsible for any radio or TV interference cause by unauthorized modification to the equipment. It is the responsibility of the user to correct such interference.

FCC SDOC SUPPLIER'S DECLARATION OF CONFORMITY

Arovast Corporation hereby declares that this equipment is in compliance with the FCC Part 18 Subpart B. The declaration of conformity may be consulted in the support section of our Web site, accessible from www.levoit.com

WARRANTY INFORMATION

Product	Dual 150 Ultrasonic Cool Mist Humidifier	
Model	LUH-D302-WUS	
For your own reference, we strongly recommend that you record your order ID and date of purchase.		
Date of Purchase		
Order ID		

Terms & Policy

Arovast Corporation ("Arovast") warrants this product to the original purchaser to be free from defects in material and workmanship, under normal use and conditions, for a period of 2 years from the date of original purchase.

Arovast agrees, at our option during the warranty period, to repair any defect in material or workmanship or furnish an equal product in exchange without charge, subject to verification of the defect or malfunction and proof of the date of purchase.

There is no other express warranty. This warranty does not apply:

- If the product has been modified from its original condition;
- If the product has not been used in accordance with directions and instructions in the user manual;
- To damages or defects caused by accident. abuse, misuse or improper or inadequate maintenance;
- To damages or defects caused by service or repair of the product performed by an unauthorized service provider or by anyone other than Arovast:
- To damages or defects occurring during commercial use, rental use, or any use for which the product is not intended:
- To damages or defects exceeding the cost of the product.

Arovast will not be liable for indirect, incidental, or consequential damages in connection with the use of the product covered by this warranty.

This warranty extends only to the original consumer purchaser of the product and is not transferable to any subsequent owner of the product regardless of whether the product is transferred during the specified term of the warranty.

This warranty does not extend to products purchased from unauthorized sellers. Arovast's warranty extends only to products purchased from authorized sellers that are subject to Arovast's quality controls and have agreed to follow its quality controls

emblv

All implied warranties are limited to the period of this limited warranty.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

If you discover that your product is defective within the specified warranty period, please contact Customer Support via support@levoit.com. **DO NOT** dispose of your product before contacting us. Once our Customer Support Team has approved your request, please return the product with a copy of the invoice and order ID.

Every Levoit product automatically includes a 2-year warranty. To make the customer support process quick and easy, register your product online at www.levoit.com/warranty.

This warranty is made by: Arovast Corporation 1202 N. Miller St., Suite A Anaheim, CA 92806

CUSTOMER SUPPORT

If you have any questions or concerns about your new product, please contact our helpful Customer Support Team.

Arovast Corporation

1202 N. Miller St., Suite A Anaheim. CA 92806

Email: support@levoit.com Toll-Free: (888) 726-8520

Support Hours

Mon-Fri, 9:00 am-5:00 pm PST/PDT

*Please have your order invoice and order ID ready before contacting Customer Support.